


# COR Vision Plus

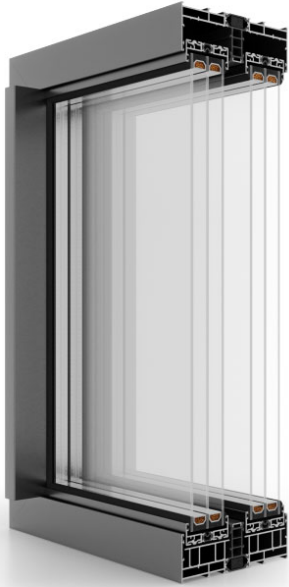

- ✓ profile with the construction depth 180 mm
- ✓ glazing with glass units from 36 to 54 / optimal (6esg / 18ar / 6esg / 18ar / 6esg - 54mm) to 56mm
- ✓ sash with a construction depth: 69mm
- ✓ maximum window dimensions: H up to 4000 mm, L up to 4000 mm
- ✓ maximum sash weight: 400 kg (manual), 700 kg (motorized)
- ✓ width of the thermal break: frame 40 mm, sash 18-32 mm
- ✓ we lacquer in the full RAL K7 colour palette and, on request, in other colours (use powder code)

**0.9**

U<sub>w</sub> (W / m<sup>2</sup>K)

**2**

Guiding Rails

A minimalist aluminium sliding system designed for large glazing with a glass area of 94%. It allows for maximum illumination while minimizing the visible cross-sections of aluminum.

U<sub>w</sub> = 0.95 W/m<sup>2</sup>K for a 3200 x 2500 system with 6ESG/18Ar/6ESG/18Ar/6ESG glazing (U<sub>g</sub> = 0.5 W/m<sup>2</sup>K)

\*Coefficient calculated for doors with dimensions 3200 x 2500 mm.

SLIDING DOORS

ALUMINUM

WINDOWS

DOORS

COR VISION PLUS